

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
**WO 2004/005167 A1**

(51) International Patent Classification<sup>7</sup>: **B65G 21/18, 15/54** [SE/SE]; Brovägen 21, S-260 41 Nyhamnsläge (SE).  
MALMBERG, Jonny [SE/SE]; Krika Skog 2228, S-264 92 Klippan (SE).

(21) International Application Number: PCT/SE2003/001094 (74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö (SE).

(22) International Filing Date: 25 June 2003 (25.06.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data: 0202117-8 8 July 2002 (08.07.2002) SE


(71) Applicant (for all designated States except US): FRIGOSCANDIA EQUIPMENT AB [SE/SE]; Box 913, S-251 09 Helsingborg (SE).

(72) Inventors; and (81) Designated States (national): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(75) Inventors/Applicants (for US only): OLSSON, Lennart (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

*[Continued on next page]*

(54) Title: CONVEYOR BELT

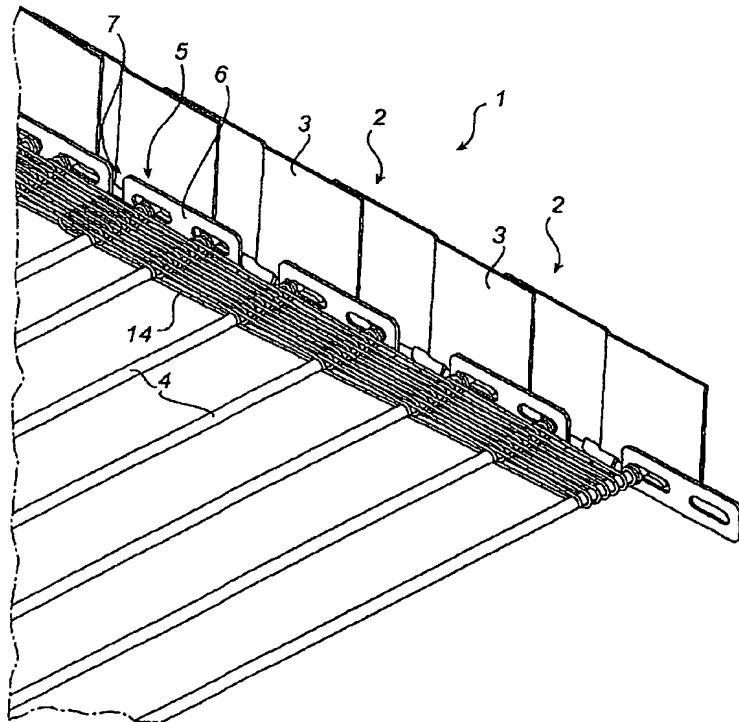

(57) Abstract: An endless conveyor belt for an air conditioning plant, in which the conveyor belt extends helically along part of its length, comprising transverse rods (4) and lateral elements (3). The conveyor belt is characterised in that the lateral elements (3) are connected in pairs to only two rods (4), which are fixedly connected to said lateral elements (3) and form, with these, a link means (2), and adjoining link means (2) are articulated to each other by a coupling element (5) arranged therebetween and connected to neighbouring rods (4) of the adjoining link means (2).

WO 2004/005167 A1